

BUILDING LIFECYCLE REPORT

LARGE-SCALE
RESIDENTIAL
DEVELOPMENT

42a PARKGATE STREET
DUBLIN 8 (BLOCK A +
B2 AMENDMENTS)



CLIENT

RUIRSIDE DEVELOPMENTS
LIMITED

aramark 

Contents

- 1.0 Executive Summary – Building Lifecycle Report
- 2.0 Description of Development
- 3.0 Introduction
- 4.0 External Building Fabric Schedule
 - 4.1 Roofing
 - 4.2 Rainwater Drainage
 - 4.3 External Walls
 - 4.4 External Windows & Doors
 - 4.5 Balconies
- 5.0 Internal Building Fabric Schedule
 - 5.1 Floors
 - 5.2 Walls
 - 5.3 Ceilings
 - 5.4 Internal Handrails & Balustrades
 - 5.5 Carpentry & Joinery
- 6.0 Building Services
 - 6.1 Mechanical Systems
 - 6.2 Electrical / Protective Services
- 7.0 Appendix 1
 - 7.1 Sample Schedule for Costs Evaluation
- 8.0 Conclusion & Contact Details
 - Contact Details
 - Aramark Key Service Lines
 - Document Control Sheet

01

EXECUTIVE SUMMARY

1.0 EXECUTIVE SUMMARY – BUILDING LIFE CYCLE REPORT

Measures to effectively manage and reduce costs for the benefit of residents.

This Building Lifecycle Report is in response to amendments of previously permitted application, ABP Ref. ABP-310567-21 (as amended by DCC Reg. Ref. LRD6042/23).

The following document reviews the amended specification set out for the proposed expansion of Block A footprint and façade to accommodate a 2nd fire core and the reconfiguration of Block B2 to provide 8no. new 'Build-to-Sell' apartments (1no. unit per floor) and 1no. 2-bedroom apartment in place of a 1-bedroom unit at the interface of Block A and Block B2 (increases to 48no. units total) that result in a combined increase of apartments from 238no. units to 246no. units (Block A and Block B2) at No. 42A Parkgate Street, Dublin 8, plus explores the practical implementation of the design and material principles which have informed design of roofs, façades, internal layouts and detailing of the proposed development and building typologies.

Building materials proposed for use on elevations and in the public realm achieve a durable standard of quality that will not need regular fabric replacement or maintenance outside general day to day care. The choice of high quality and long-lasting materials, as well as both soft and hardscape in the public, semi-public and private realm, and communal open space will contribute to lower maintenance costs for future residents and occupiers.

This report has been prepared on the basis of information available at planning stage. This report reflects the outline material descriptions contained within Reddy Architecture + Urbanism's amended Architectural Design Statement and planning drawings received.

For any elements where information was not available, typical examples have been provided of building materials and services used for schemes of this nature and their associated lifespans and maintenance requirements. All information is therefore indicative subject to confirmation at detailed design stage.

As the building design develops this document will be updated and a schedule will be generated from the items below detailing maintenance and replacement costs over the lifespan of the materials and development constituent parts in a summary document. This will enable a robust schedule of building component repair and replacement costs which will be available to the property management company so that running, and maintenance costs of the development are kept within the agreed Annual operational budget, this will take the form of a Planned Preventative Maintenance Schedule (PPM) at operational commencement of the development.


02

DESCRIPTION OF DEVELOPMENT

2.0 DESCRIPTION OF DEVELOPMENT

The proposed development comprises the following:

The proposed development comprises amendments to development permitted under ABP Ref. ABP-310567-21 (as amended by DCC Reg. Ref. LRD6042/23) at No. 42A Parkgate Street, Dublin 8 to expand the footprint and façade of Block A to accommodate a 2nd fire core. As a result of the expanded footprint, Block B2 has been reconfigured to provide 8no. new 'Build-to-Sell' apartments (1no. unit per floor) and 1no. 2-bedroom apartment in place of a 1-bedroom unit at the interface of Block A and Block B2 (increases to 48no. units total). Overall, the amendments result in the combined number of apartments increasing from 238no. units to 246no. units in Block A and Block B2.

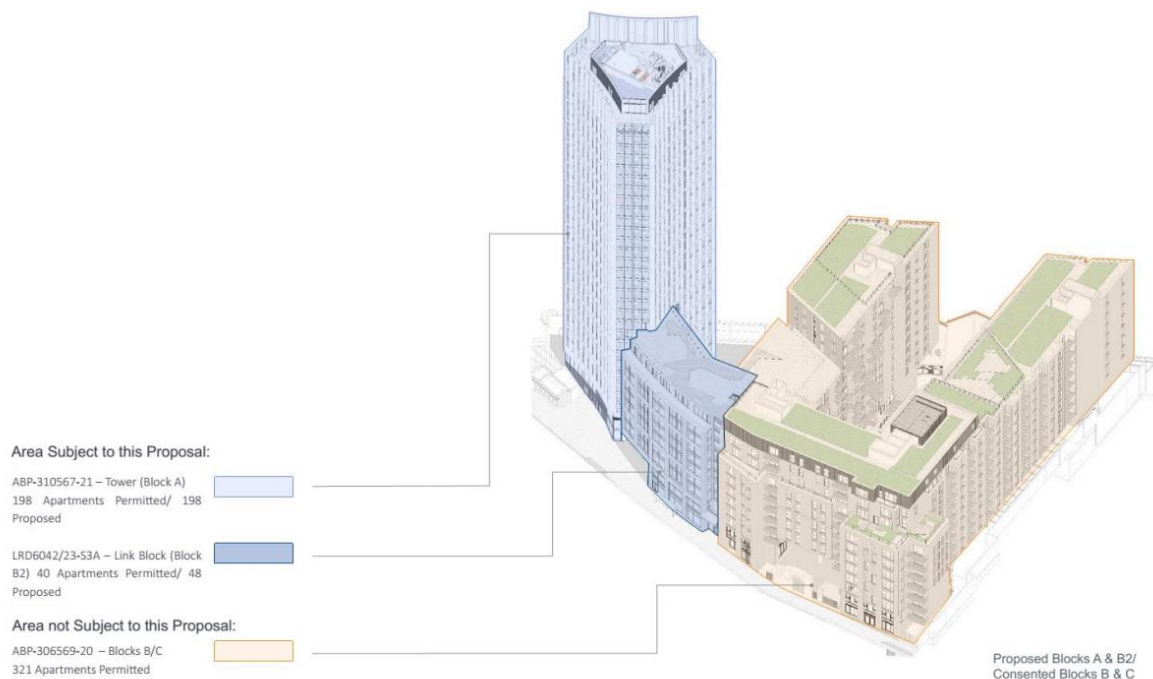

03

INTRODUCTION

3.0 INTRODUCTION

Aramark Property were instructed by Ruirside Developments Limited, to provide a Building Lifecycle Report for their amendments to expand Block A footprint and façade to accommodate a 2nd fire core and the reconfiguration of Block B2 to provide 8no. new 'Build-to-Sell' apartments (1no. unit per floor) and 1no. 2-bedroom apartment in place of a 1-bedroom unit at the interface of Block A and Block B2 (increases to 48no. units total). Overall, the combined amendments result in the apartments increasing from 238no. units to 246no. units in Block A and Block B2 at No. 42A Parkgate Street, Dublin 8.

The purpose of this report is to provide an initial assessment of long-term running and maintenance costs as they would apply on a per residential unit basis at the time of application, as well as demonstrating what measures have been specifically considered to effectively manage and reduce costs for the benefit of the residents. This is achieved by producing a Building Lifecycle Report.

This Building Lifecycle Report has been developed on foot of the revised guidelines for Sustainable Urban Housing: Design Standards for New Apartments - Guidelines for Planning Authorities (July 2023) issued under Section 28 of the Planning and Development Act, 2000 (as amended). Within the new guidelines, new guidance is being provided on residential schemes.

Section 6.12 of the Operation and Management of Apartment Developments (July 2023) requires that:

“planning applications for apartment development shall include a building lifecycle report which in turn includes an assessment of long-term running and maintenance costs as they would apply on a per residential unit basis at the time of application, as well as demonstrating what measures have been specifically considered by the proposer to effectively manage and reduce costs for the benefit of residents.”

04

EXTERNAL BUILDING FABRIC SCHEDULE

4.0 EXTERNAL BUILDING FABRIC SCHEDULE

4.1 Roofing

4.1.1 Green Roofs (Manufacturer / Supplier TBC)

<i>Location</i>	Selected Flat Roof Areas (maintenance access only)
<i>Description</i>	Extensive green roof system to engineer's specification.
<i>Lifecycle</i>	Average lifecycle of 15-35 years on most green roofs. Lifecycle will be extended with robust proven detailing to adjoining roof elements and appropriate and regular maintenance of the roof materials.
<i>Required maintenance</i>	Quarterly maintenance visits to include inspection of drainage layer and outlets and removal of any blockages to prevent ponding. Inspection of vegetation layer for fungus and decay. Carry out weeding as necessary. No irrigation necessary with sedum blankets.
<i>Year</i>	Bi-annually
<i>Priority</i>	Medium
<i>Selection process</i>	A green roof will add to the character of the overall scheme, as well as providing attenuation to storm water run-off and less burden on rainwater goods, increased thermal and sound insulation to the building and increased biodiversity. Natural soft finishes can provide visual amenity for residents where roof areas are visible or accessible from within areas of the scheme. Sedum roofs are a popular and varied choice for green roofs requiring minimal maintenance.
<i>Reference</i>	Reddy Architecture + Urbanism planning drawings & design statement.

4.1.2 Roof (Manufacturer / Supplier TBC)

<i>Location</i>	Selected Flat Roof Areas (maintenance access only)
<i>Description</i>	<ul style="list-style-type: none"> • Single layer membrane roof system to engineer's specification. • Selected membrane and pressed metal cappings.
<i>Lifecycle</i>	Average lifecycle of 15-25 years on most membrane roofs. Lifecycle will be extended with robust proven detailing to adjoining roof elements and appropriate and regular maintenance of the roof materials.
<i>Required maintenance</i>	Half-yearly maintenance visits to include inspection of membrane material for puncture / cracks on sheeting; seams and flashing details; around drainage and ventilation outlets and removal of any vegetation/moss blockages to prevent ponding.
<i>Year</i>	Half-Yearly / Annual
<i>Priority</i>	Medium
<i>Selection process</i>	Membrane roof with appropriate built-up system will provide durability, lacks water permeability, and easily maintain without shutting down building operations during application.
<i>Reference</i>	Reddy Architecture + Urbanism amended planning drawings & design statement.

4.1.3 Roof Terraces (Manufacturer / Supplier TBC)

<i>Location</i>	Selected Communal Terraces (Hard Landscaping)
<i>Description</i>	<ul style="list-style-type: none"> • Intensive green roof system to architects and engineers' specifications. • Light weight precast concrete/stone paving slabs on support system.
<i>Lifecycle</i>	Average lifecycle of 30 years. As used across the industry nationally and the UK, typically longer lifecycle is achieved by regular inspection and maintenance regime to ensure the upkeep of materials.
<i>Required maintenance</i>	Regular maintenance visits to include inspection of drainage outlets and removal of any blockages. General repair works, watching out for displacement of slabs, mortar decay and removal of organic matter. Power-washing of hard surfaces.
<i>Year</i>	Quarterly / annual
<i>Priority</i>	Medium
<i>Selection process</i>	Paving slabs provide a robust and long-lasting roof terrace surface, requiring considerably less maintenance when compared to timber decking or gravel surfaces.
<i>Reference</i>	Reddy Architecture + Urbanism amended planning drawings & design statement.

4.1.4 Flashings (Manufacturer / Supplier TBC)

<i>Location</i>	All flashing locations
<i>Description</i>	Appropriate materials to be used for all flashing and counter flashings.
<i>Lifecycle</i>	Typical life expectancy of 70 years recorded for flashings. Recessed joint sealing requires regular inspections. Longer lifecycle achieved by regular inspection and maintenance regime to ensure upkeep of materials.
<i>Required maintenance</i>	Check joint fixings for flashing, ground survey annually and close-up inspection every 5 years. Re-secure as necessary.
<i>Year</i>	Ground level inspection annually and close-up inspection every 5 years
<i>Priority</i>	Medium
<i>Selection process</i>	Alternatives to lead has longest life expectancy of comparable materials such as copper (60 years) and zinc (50 years). Provided appropriate safety precautions are taken, lead is the recommended choice for large residential, commercial, or industrial builds. Lead is easily formed into the required shapes for effective weathering of building junctions according to standard Lead Sheet Association details.
<i>Reference</i>	N/A

4.1.5 Fall Arrest System for Roof Maintenance Access (Manufacturer / Supplier TBC)

<i>Location</i>	Flat roof areas to all blocks (maintenance access only)
<i>Description</i>	<ul style="list-style-type: none"> Fall Protection System on approved anchorage device. Installation in accordance with BS 7883 by the system manufacturer or a contractor approved by the system manufacturer.
<i>Lifecycle</i>	25-30 years dependent on quality of materials. Generally steel finishes to skyward facing elements can be expected to maintain this life expectancy.
<i>Required maintenance</i>	Check and reset tension on the line as per manufacturer's specifications. Check all hardware components for wear (shackles, eye bolts, turn buckles). Check elements for signs of wear and/or weathering. Lubricate all moving parts. Check for structural damage or modifications.
<i>Year</i>	Annually
<i>Priority</i>	High
<i>Selection process</i>	Fall protection systems are a standard life safety system, provided for safe maintenance of roofs and balconies where there is not adequate parapet protection. Fall protection systems must comply with relevant quality standards.
<i>Reference</i>	N/A

4.1.6 Roof Cowls (Manufacturer / Supplier TBC)

<i>Location</i>	Selected Flat Roof Areas
<i>Description</i>	Roof Cowl System to be supplied with weather apron for flat roofs.
<i>Lifecycle</i>	25-35 years. As used across the industry nationally, typically longer lifecycle is achieved by regular inspection and maintenance regime to ensure the upkeep of materials.
<i>Required maintenance</i>	Check fixings annually, inspect for onset of leading-edge corrosion if epoxy powder coat finish and treat.
<i>Year</i>	Annually
<i>Priority</i>	Low
<i>Selection process</i>	Standard fitting for roof termination of mechanical ventilation system.
<i>Reference</i>	N/A

4.2 Rainwater Drainage

<i>Location</i>	All buildings
<i>Description</i>	<ul style="list-style-type: none"> • <i>Rainwater outlets:</i> Suitable for specified roof membranes • <i>Pipework:</i> uPVC downpipes and gutters • <i>Below ground drainage:</i> To Engineers' design and specification • <i>Disposal:</i> To surface water drainage to Engineers' design • <i>Controls:</i> To Engineers' design and specification • <i>Accessories:</i> allow for outlet gradings, spigots, downspout nozzle, hopper heads, balcony and main roof outlets
<i>Lifecycle</i>	uPVC gutters and downpipes have an expected life expectancy of 40 years in rural and suburban conditions (25 years in industrial and marine conditions), this is comparable to cast iron of 50 years and plastic, less so at 30 years. As used across the industry nationally, typically longer lifecycle is achieved by regular inspection and maintenance regime to ensure the upkeep of materials.
<i>Required maintenance</i>	As with roofing systems routine inspection is key to preserving the lifecycle of rainwater systems. Regular cleaning and rainwater heads and gutters, checking joints and fixings and regularly cleaning polyester coated surfaces (no caustic or abrasive materials).
<i>Year</i>	Annually, cleaning bi-annually
<i>Priority</i>	High
<i>Selection process</i>	As above, uPVC fittings compare well against cast iron (in terms of cost) and plastic (in terms of lifespan and aesthetic).
<i>Reference</i>	N/A

4.3 External Walls

4.3.1 Brick (Manufacturer / Supplier TBC)

<i>Location</i>	Façades
<i>Description</i>	Contrasting light and dark tone brickwork.
<i>Lifecycle</i>	Selected colour bricks have a high embodied energy, they are an extremely durable material. Brickwork in this application is expected to have a lifespan of 50-80 years. The mortar pointing however has a shorter lifespan of 25-50 years. Longer lifecycle achieved by regular inspection and maintenance regime.
<i>Required maintenance</i>	In general, given their durability, brickwork finishes require little maintenance. Most maintenance is preventative: checking for hairline cracks, deterioration of mortar, plant growth on walls, or other factors that could signal problems or lead to eventual damage.
<i>Year</i>	Annual
<i>Priority</i>	Low
<i>Selection process</i>	Aesthetic, lightweight, cost-efficient and low maintenance cladding option, indistinguishable from traditional brick construction.
<i>Reference</i>	Reddy Architecture + Urbanism amended planning drawings & design statement.

4.3.2 Metal (Manufacturer / Supplier TBC)

<i>Location</i>	Façades
<i>Description</i>	Zinc/aluminium metal cladding system.
<i>Lifecycle</i>	Lifespan expectancy generally in excess of 40 years. As used across the industry nationally, typically longer lifecycle is achieved by regular inspection and maintenance regime to ensure the upkeep of materials.
<i>Required maintenance</i>	Metal cladding requires little maintenance and is resistant to corrosion. It can contribute to lower ongoing maintenance costs in comparison to exposed porous materials which may be liable to faster deterioration. Long term cleaning requirements should be taken into consideration.
<i>Year</i>	Inspection annually; cleaning 5 yearly
<i>Priority</i>	Low
<i>Selection process</i>	Metal cladding protects the building's structure from rainwater and weathering. Metal cladding systems are also chosen for their aesthetic impact, durability and weathering properties.
<i>Reference</i>	Reddy Architecture + Urbanism amended planning drawings & design statement.

4.3.3 Stone (Manufacturer / Supplier TBC)

<i>Location</i>	Facades
<i>Description</i>	Light coloured stone effect band.
<i>Lifecycle</i>	Stone finish cladding is expected to have a lifespan in the region of 60-80 years.
<i>Required maintenance</i>	In general, given its durability, stone requires little maintenance and weathers well. Most maintenance is preventative; check for deterioration of mortar, plant growth, or other factors that could signal problems or lead to eventual damage.
<i>Year</i>	Annual
<i>Priority</i>	Low
<i>Selection process</i>	Stone is a natural and highly durable material offering a robust aesthetic. Has a high durability.
<i>Reference</i>	Reddy Architecture + Urbanism amended planning drawings & design statement.

4.4 External Windows & Doors

<i>Location</i>	Façades
<i>Description</i>	<ul style="list-style-type: none"> • Full height, mixture of clear and obscure glazed windows with uPVC / Aluminum painted timber coated frames to select finish. • All units to be double/tripled glazed with thermally broken frames. • All opening sections in windows to be fitted with suitable restrictors. Include for all necessary ironmongery; all pointing and mastic sealant; fixed using stainless steel metal straps screwed to masonry reveals; include for all bends, drips, flashings, thermal breaks etc.
<i>Lifecycle</i>	Aluminium clad timber has a typical lifespan of 45-60 years in comparison to uPVC which has a typical lifespan of 30-40 years. As used nationwide and in the UK, typically longer lifecycle is achieved by regular inspection and maintenance regime to ensure the upkeep of materials.
<i>Required maintenance</i>	Check surface of windows and doors regularly so that damage can be detected. Vertical mouldings can become worn and require more maintenance than other surface areas. Lubricate at least once a year.

	Ensure regular cleaning regime. Check for condensation on frame from window and ensure ventilation.
<i>Year</i>	Annual
<i>Priority</i>	Medium
<i>Selection process</i>	uPVC is durable and low maintenance with an average lifespan of 30 - 40 years. Alu-clad timber windows compare favourably when compared to the above, extending timber windows typical lifespan of 35-50 years by 10-15 years.
<i>Reference</i>	N/A

4.5 Balconies

4.5.1 Structure

<i>Location</i>	Façades
<i>Description</i>	<ul style="list-style-type: none"> Concrete balcony system to engineer's detail, or Powder-coated steel frame balcony system to engineer's detail Thermally broken farrat plate connections to main structure of building.
<i>Lifecycle</i>	<ul style="list-style-type: none"> Metal structure has a typical life expectancy of 70 years dependent on maintenance of components. Precast concrete structures have a high embodied energy; however, it is an extremely durable material. Concrete frame has a typical life expectancy of 80 years. As used across the industry nationally and the UK, longer lifecycle is achieved by regular inspection and maintenance regime to ensure the upkeep of materials.
<i>Required maintenance</i>	Relatively low maintenance required. Check balcony system as per manufacturer's specifications. Check all hardware components for wear. Check elements for signs of wear and/or weathering. Check for structural damage or modifications.
<i>Year</i>	Annual
<i>Priority</i>	High
<i>Selection process</i>	Engineered detail; designed for strength and safety.
<i>Reference</i>	N/A

4.5.2 Balustrades and Handrails

<i>Location</i>	Balconies
<i>Description</i>	<ul style="list-style-type: none"> Frameless tempered glass (safety glass) Glass supported on framing system positioned behind glass. Approved toughened safety glass and steel including fixings in accordance with manufacturer's details.
<i>Lifecycle</i>	General glass and metal items have a lifespan of 25-45 years. Longer lifecycle is achieved by regular inspection and maintenance regime to ensure the upkeep of materials.
<i>Required maintenance</i>	Annual visual inspection of connection pieces for impact damage or alterations.
<i>Year</i>	Annual
<i>Priority</i>	High
<i>Selection process</i>	Metal and glass options will have a longer lifespan and require less maintenance than timber options (10-20 years).

05

INTERNAL BUILDING FABRIC SCHEDULE

5.0 INTERNAL BUILDING FABRIC SCHEDULE

5.1 Floors

5.1.1 Common Areas

<i>Location</i>	Entrance lobbies / Common corridors
<i>Description</i>	<ul style="list-style-type: none"> Selected anti-slip porcelain floor tile complete with inset matwell. Selected loop pile carpet tiles.
<i>Lifecycle</i>	<ul style="list-style-type: none"> 20-30 years lifespan for floor tiles in heavy wear areas. Likely requirement to replace for modernisation within this period also. 10–15-year lifespan for carpet. Likely requirement to replace for modernisation within this period also.
<i>Required maintenance</i>	Visual inspection with regular cleaning, intermittent replacement of chipped / loose tiles
<i>Year</i>	<ul style="list-style-type: none"> Annual for floor tiles. Quarterly inspection and cleaning of carpets as necessary
<i>Priority</i>	Low
<i>Selection process</i>	Durable, low maintenance floor finish. Slip rating required at entrance lobby, few materials provide this and are as hard wearing. Using carpet allows flexibility to alter and change as fashions alter and change providing enhanced flexibility.
<i>Reference</i>	N/A

<i>Location</i>	Stairwells, landings / half landings
<i>Description</i>	Selected carpet covering. Approved anodised aluminium nosing's to stairs.
<i>Lifecycle</i>	<ul style="list-style-type: none"> 10–15-year lifespan for carpet. Likely requirement to replace for modernisation within this period also. 20-year lifespan for aluminium nosing's.
<i>Required maintenance</i>	Visual inspection with regular cleaning.
<i>Year</i>	Quarterly inspection and cleaning as necessary.
<i>Priority</i>	Low
<i>Selection process</i>	Using carpet allows flexibility to alter and change as fashions alter and change providing enhanced flexibility.
<i>Reference</i>	N/A

<i>Location</i>	Lift Lobbies
<i>Description</i>	Carpet/vinyl and porcelain tiles to match adjacent apartment common lobbies.
<i>Lifecycle</i>	<ul style="list-style-type: none"> 20-30 years lifespan for floor tiles in heavy wear areas. Likely requirement to replace for modernisation within this period also. 10–15-year lifespan for carpet. Likely requirement to replace for modernisation within this period also.
<i>Required maintenance</i>	Visual inspection with regular cleaning, intermittent replacement of chipped / loose tiles.
<i>Year</i>	Annual
<i>Priority</i>	Low
<i>Selection process</i>	Slip rating required for lifts, few materials provide this and are as hard wearing. Using carpet allows flexibility to alter and change as fashions alter and change providing enhanced flexibility.
<i>Reference</i>	N/A

5.1.2 Tenant Areas

<i>Location</i>	Resident Amenity (e.g. Cultural Community, Co-working, Lounge, etc)
<i>Description</i>	<ul style="list-style-type: none"> • Timber laminate / parquet flooring, or • Carpet covering • Provide for inset matwell
<i>Lifecycle</i>	<ul style="list-style-type: none"> • Laminated / parquet timber flooring has an expected life expectancy of 25-35 years dependent on use. • 10-15 year lifespan for carpet. Likely requirement to replace for modernisation within this period also
<i>Required maintenance</i>	Visual inspection. Sweep clean regularly ensuring to remove any dirt. Clean up spills immediately and use only recommended floor cleaners.
<i>Year</i>	Annual
<i>Priority</i>	Low
<i>Selection process</i>	Materials chosen for aesthetics, durability and low maintenance.
<i>Reference</i>	N/A

<i>Location</i>	All wet areas (e.g., WC's)
<i>Description</i>	Selected anti-slip ceramic floor tile.
<i>Lifecycle</i>	Lifespan expectation of 20-25 years in heavy wear areas, likely requirement to replace for modernisation within this period also.
<i>Required maintenance</i>	Visual inspection, intermittent replacement of chipped / loose tiles.
<i>Year</i>	Annual
<i>Priority</i>	Low
<i>Selection process</i>	Slip rating required at entrance lobby, few materials provide this and are as hard wearing.
<i>Reference</i>	N/A

5.2 Walls

5.2.1 Common Areas

<i>Location</i>	Entrance lobbies / Corridors
<i>Description</i>	Selected paint finish with primer to skimmed plasterboard.
<i>Lifecycle</i>	2-10 years for finishes; 40 years for plasterboard. Longer lifecycle achieved by regular inspection and maintenance regime to ensure the upkeep of materials.
<i>Required maintenance</i>	Regular maintenance required and replacement when damaged.
<i>Year</i>	Bi-annually
<i>Priority</i>	Low
<i>Selection process</i>	Decorative and durable finish.
<i>Reference</i>	N/A

<i>Location</i>	Lift cores / lobbies / corridors / stairs
<i>Description</i>	Selected paint finish with primer to skimmed plasterboard.
<i>Lifecycle</i>	2-10 years for finishes; 40 years for plasterboard. Longer lifecycle achieved by regular inspection and maintenance regime to ensure the upkeep of materials.
<i>Required maintenance</i>	Regular maintenance required and replacement when damaged.
<i>Year</i>	Bi-annually
<i>Priority</i>	Low
<i>Selection process</i>	Decorative and durable finish.
<i>Reference</i>	N/A

5.2.2 Tenant Areas

<i>Location</i>	Resident Amenity (e.g. Cultural Community, Co-working, Lounge, etc)
<i>Description</i>	Selected paint finish with primer to skimmed plasterboard
<i>Lifecycle</i>	2-10 years for finishes; 40 years for plasterboard. Longer lifecycle achieved by regular inspection and maintenance regime to ensure the upkeep of materials.
<i>Required maintenance</i>	Regular maintenance required and replacement when damaged.
<i>Year</i>	Bi-annually
<i>Priority</i>	Low
<i>Selection process</i>	Decorative and durable finish.
<i>Reference</i>	N/A

<i>Location</i>	Wet areas (e.g. WC's)
<i>Description</i>	Selected ceramic wall tile to plasterboard (moisture board to wet areas).
<i>Lifecycle</i>	Typical life expectancy of 35-40 years, less in wet room areas to 20-25 years.
<i>Required maintenance</i>	Bi-annual inspection to review damage, local repairs as necessary, particular detailed inspection in wet room areas.
<i>Year</i>	Annually
<i>Priority</i>	Medium
<i>Selection process</i>	Wet room application requires moisture board and tiling.
<i>Reference</i>	N/A

5.3 Ceilings

<i>Location</i>	Common areas & tenant areas
<i>Description</i>	Selected paint finish with primer to skimmed plasterboard ceiling on metal frame ceiling system. Acoustic ceiling to lift core and apartment lobbies. Moisture board to wet areas.
<i>Lifecycle</i>	2-10 years for finishes; 40 years for plasterboard. Longer lifecycle achieved by regular inspection and maintenance regime to ensure the upkeep of materials.
<i>Required maintenance</i>	Regular maintenance required and replacement when damaged.
<i>Year</i>	Bi-annually
<i>Priority</i>	Low
<i>Selection process</i>	Decorative and durable finish
<i>Reference</i>	N/A

<i>Location</i>	Resident Amenity (e.g. Cultural, etc)
<i>Description</i>	Selected paint finish with primer to skimmed moisture board ceiling.
<i>Lifecycle</i>	2-10 years for finishes; 40 years for plasterboard. Longer lifecycle achieved by regular inspection and maintenance regime to ensure the upkeep of materials.
<i>Required maintenance</i>	Regular maintenance required and replacement when damaged.
<i>Year</i>	Bi-annually
<i>Priority</i>	Low
<i>Selection process</i>	Decorative and durable finish.
<i>Reference</i>	N/A

5.4 Internal Handrails & Balustrades

<i>Location</i>	Stairs & landings
<i>Description</i>	Mild steel painted balustrade and handrail.
<i>Lifecycle</i>	Over 40 years typical lifecycle. Longer lifecycle achieved by regular inspection and maintenance regime to ensure the upkeep of materials.
<i>Required maintenance</i>	Regular inspections of holding down bolts and joints
<i>Year</i>	Annually
<i>Priority</i>	High
<i>Selection process</i>	Hard-wearing long-life materials against timber options
<i>Reference</i>	N/A

5.5 Carpentry & Joinery

5.5.1 Internal Doors and Frames

<i>Location</i>	All buildings
<i>Description</i>	<ul style="list-style-type: none"> Selected white primed and painted/varnished solid internal doors, or hardwood veneered internal doors. All fire rated doors and joinery items to be manufactured in accordance with B.S. 476 (Fire Tests). Timber saddle boards. Brushed aluminium door ironmongery or similar
<i>Lifecycle</i>	30 years average expected lifespan. Longer lifecycle achieved by regular inspection and maintenance regime to ensure the upkeep of materials.
<i>Required maintenance</i>	General maintenance in relation to impact damage and general wear and tear
<i>Year</i>	Annual
<i>Priority</i>	Low, unless fire door High
<i>Selection process</i>	Industry standard
<i>Reference</i>	N/A

5.5.2 Skirtings & Architraves

<i>Location</i>	All buildings
<i>Description</i>	Painted timber / Medium-density fibreboard (MDF) skirtings and architraves
<i>Lifecycle</i>	30 years average expected lifespan. Longer lifecycle achieved by regular inspection and maintenance regime to ensure the upkeep of materials.
<i>Required maintenance</i>	General maintenance in relation to impact damage and general wear and tear
<i>Year</i>	Annual
<i>Priority</i>	Low
<i>Selection process</i>	Industry standard
<i>Reference</i>	N/A

5.5.3 Window Boards

<i>Location</i>	All Buildings
<i>Description</i>	Painted timber / Medium-density fibreboard (MDF) window boards
<i>Lifecycle</i>	30 years average expected lifespan
<i>Required maintenance</i>	General maintenance in relation to impact damage and general wear and tear
<i>Year</i>	Annual
<i>Priority</i>	Low
<i>Selection process</i>	Industry standard
<i>Reference</i>	N/A

06

BUILDING SERVICES



6.0 BUILDING SERVICES

6.1 Mechanical Systems

6.1.1 Mechanical Plant

<i>Location</i>	Residential / Apartments
<i>Description</i>	Water Heating is proposed to consist of Centralised Air Source Heat Pumps (ASHP), with supplementary back-up Modulating Gas Boilers. Further details to be provided by Mechanical & Electrical (M&E) Consultant at detailed design stage.
<i>Lifecycle</i>	<ul style="list-style-type: none"> • Annual Maintenance / Inspection to Heating System • Annual Maintenance / Inspection to Air Source Heat Pumps • Annual Maintenance / Inspection to Gas Boilers • Annual Maintenance / Inspection to Heating and Water Pumps. • Annual Maintenance / Inspection to Water Tanks. • Annual Maintenance / Inspection to Water Booster - sets. • Annual Maintenance / Inspection to DHS Tanks. • Cost for replacement equipment to be updated on completion of design matrix of equipment at detailed design stage. • Replacement of equipment at End of Life (EOL) to be determined at detailed design stage.
<i>Required maintenance</i>	Annual Service Inspections to be included as part of Development Planned Preventative Maintenance (PPM) Programme
<i>Year</i>	Annually
<i>Priority</i>	Medium
<i>Selection process</i>	All equipment to be detailed as part of the detailed design section of the development. This equipment will be selected in conjunction with the design and management team to meet and exceed the Chartered Institution of Building Services Engineers of Ireland's (CIBSE) recommended lifecycles.
<i>Reference</i>	N/A

<i>Location</i>	Non-Residential and Common Areas
<i>Description</i>	Water Heating shall consist of Centralised Air Source Heat Pumps (ASHP), with supplementary back-up Modulation Gas Boilers. Further details to be provided by the M&E Consultant at detailed design stage.
<i>Lifecycle</i>	<ul style="list-style-type: none"> • Annual Maintenance / Inspection of Air Source Heat Pumps • Annual Maintenance / Inspection of Gas Boilers • Annual Maintenance / Inspection to Heating and Water Pumps. • Annual Maintenance / Inspection to Water Tanks. • Annual Maintenance / Inspection to Water Booster - sets. • Annual Maintenance / Inspection to DHS Tanks. • Annual Maintenance / Inspection to Photovoltaic Panels. • Cost for replacement equipment to be updated on completion of design matrix of equipment at detailed design stage. • Replacement of equipment at End of Life (EOL) to be determined at detailed design stage.
<i>Required maintenance</i>	Annual Service Inspections to be included as part of Development Planned Preventative Maintenance (PPM) Programme
<i>Year</i>	Annually
<i>Priority</i>	Medium

<i>Selection process</i>	All equipment to be detailed as part of the detailed design section of the development. This equipment will be selected in conjunction with the design and management team to meet and exceed the Chartered Institution of Building Services Engineers of Ireland's (CIBSE) recommended lifecycles.
<i>Reference</i>	N/A

6.1.2 Soils and Wastes

<i>Location</i>	All Areas / Kitchens / Bathrooms etc
<i>Description</i>	Soils and Wastes Pipework – uPVC and High-Density Polyethylene. (HDPE)
<i>Lifecycle</i>	<ul style="list-style-type: none"> • Annual inspections required for all pipework within landlord areas. • Cost for replacement equipment to be updated on completion of design matrix of equipment at detailed design stage.
<i>Required maintenance</i>	Annual Service Inspections to be included as part of Development Planned Preventative Maintenance (PPM) Programme
<i>Year</i>	Annually
<i>Priority</i>	Medium
<i>Selection process</i>	All equipment to be detailed as part of the detailed design section of the development. This equipment will be selected in conjunction with the design and management team to meet and exceed the Chartered Institution of Building Services Engineers of Ireland's (CIBSE) recommended lifecycles.
<i>Reference</i>	N/A

6.1.3 Water Services

<i>Location</i>	Residential / Apartments
<i>Description</i>	<p>Centralised Air Source Heat Pumps (ASHP), with supplementary back-up modulating Gas Boilers for domestic Hot Water.</p> <ul style="list-style-type: none"> • The water services installation in the Landlord and core areas will be copper. • Within the apartments, the water services installation will be completed using a Pre-Insulated Multi Layered Alu-Plex type system.
<i>Lifecycle</i>	<ul style="list-style-type: none"> • Annual Inspection of Air Source Heat Pump (ASHP). • Annual Inspection of Gas Boilers. • Annual inspections required for all pipework within landlord areas. • Cost for replacement equipment to be updated on completion of design matrix of equipment at detailed design stage.
<i>Required maintenance</i>	Annual Service Inspections to be included as part of Development Planned Preventative Maintenance (PPM) Programme
<i>Year</i>	Annually
<i>Priority</i>	High
<i>Selection process</i>	All equipment to be detailed as part of the detailed design section of the development. This equipment will be selected in conjunction with the design and management team to meet and exceed the Chartered Institution of Building Services Engineers of Ireland's (CIBSE) recommended lifecycles.
<i>Reference</i>	N/A

6.1.4 Ventilation Services

<i>Location</i>	Residential / Apartments
<i>Description</i>	Ducted Heat Recovery Ventilation Unit (DHRV) shall be provided within each Apartment. <ul style="list-style-type: none"> • Cooker Hoods shall be installed in the kitchens.
<i>Lifecycle</i>	<ul style="list-style-type: none"> • Annual inspection of Ducted Heat Recovery Ventilation Unit (DHRV) • Annual inspection of extract fan / and grilles • Annual Inspection of operation of fan and boost / setback facility if provided on units. • Cost for replacement equipment to be updated on completion of design matrix of equipment at detailed design stage.
<i>Required maintenance</i>	Annual Service Inspections to be included as part of Development Planned Preventative Maintenance Programme
<i>Year</i>	Annually
<i>Priority</i>	Medium
<i>Selection process</i>	All equipment to be detailed as part of the detailed design section of the development. This equipment will be selected in conjunction with the design and management team to meet and exceed the Chartered Institution of Building Services Engineers of Ireland's (CIBSE) recommended lifecycles.
<i>Reference</i>	N/A

6.2 Electrical / Protective Services

6.2.1 Electrical Infrastructure

<i>Location</i>	Switch rooms / Risers
<i>Description</i>	Maintenance of Electrical Switchgear
<i>Lifecycle</i>	<ul style="list-style-type: none"> • Annual Inspection of Electrical Switchgear and switchboards. • Thermographic imaging of switchgear 50% of Medium Voltage (MV) Switchgear Annually and Low Voltage (LV) switchgear every 3 years. • Cost for replacement equipment to be updated on completion of design matrix of equipment at detailed design stage.
<i>Required maintenance</i>	Annual / Every three years to be included as part of Development Planned Preventative Maintenance (PPM) Programme
<i>Year</i>	Annually
<i>Priority</i>	High
<i>Selection process</i>	All equipment to meet and exceed Electricity Supply Board (ESB), IS10101:2020, Chartered Institution of Building Services Engineers of Ireland's (CIBSE) recommendations and be code compliant in all cases.
<i>Reference</i>	N/A

6.2.2 Lighting Services internal

<i>Location</i>	All Areas – Internal
<i>Description</i>	Lighting – Light-Emitting Diode (LED) throughout with Presence detection in circulation areas and locally controlled in apartments.
<i>Lifecycle</i>	<ul style="list-style-type: none"> • Annual Inspection of All Luminaires • Quarterly Inspection of Emergency Lighting. • Cost for replacement equipment to be updated on completion of design matrix of equipment at detailed design stage.
<i>Required maintenance</i>	Annual / Quarterly Inspections certification as required per above remedial works.
<i>Year</i>	Annually / Quarterly
<i>Priority</i>	High
<i>Selection process</i>	All equipment to meet requirements and be in accordance with the current National Standards Authority of Ireland (NSAI) Irish Standard for Emergency Lighting I.S.3217:2013 + A1 2017, Building Regulations Technical Guidance Document Part M and Disability Access Certificate (DAC) Requirements.
<i>Reference</i>	N/A

6.2.3 Lighting Services External

<i>Location</i>	All Areas – External
<i>Description</i>	Lighting – All Light-Emitting Diode (LED) with Vandal Resistant Diffusers where exposed.
<i>Lifecycle</i>	<ul style="list-style-type: none"> • Annual Inspection of All Luminaires • Quarterly Inspection of Emergency Lighting • Cost for replacement equipment to be updated on completion of design matrix of equipment at detailed design stage.
<i>Required maintenance</i>	Annual / Quarterly Inspections certification as required as per the Planned Preventative Maintenance (PPM) schedule.
<i>Year</i>	Annually / Quarterly
<i>Priority</i>	High
<i>Selection process</i>	All equipment to meet requirements and be in accordance with the current National Standards Authority of Ireland (NSAI) Irish Standard for Emergency Lighting I.S.3217:2013 + A1 2017, Building Regulations Technical Guidance Document Part M and Disability Access Certificate (DAC) Requirements.
<i>Reference</i>	N/A

6.2.4 Protective Services – Fire Alarm

<i>Location</i>	All areas – Internal
<i>Description</i>	Fire alarm
<i>Lifecycle</i>	<ul style="list-style-type: none"> • Quarterly Inspection of panels and 25% testing of devices as per IS3218:2013 + A1 2019 requirements. • Cost for replacement equipment to be updated on completion of design matrix of equipment at detailed design stage.
<i>Required maintenance</i>	Annual / Quarterly Inspections certification as required as per the Planned Preventative Maintenance (PPM) schedule.
<i>Year</i>	Annually / Quarterly
<i>Priority</i>	High
<i>Selection process</i>	All equipment to meet requirements and be in accordance with the current National Standards Authority of Ireland (NSAI) Irish Standard for Fire Alarm Installations I.S.3218:2013 + A1 2019 and the Fire Cert
<i>Reference</i>	N/A

6.2.5 Protective Services – Fire Extinguishers

<i>Location</i>	All Areas – Internal
<i>Description</i>	Fire Extinguishers and Fire Blankets
<i>Lifecycle</i>	Annual Inspection
<i>Required maintenance</i>	Annual with Replacement of all extinguishers at year 10
<i>Year</i>	Annually
<i>Priority</i>	Cost for replacement equipment to be updated on completion of design matrix of equipment at detailed design stage.
<i>Selection process</i>	All fire extinguishers must meet the requirements of the National Standards Authority of Ireland (NSAI) Irish Standard for Portable Fire Extinguishers I.S 291:2015 + A1 2022 in relation to the selection, commissioning, installation, inspection and maintenance of portable fire extinguishers.
<i>Reference</i>	N/A

6.2.6 Protective Services – Apartment Sprinkler System (Where Applicable by Fire Cert)

<i>Location</i>	Residential / Apartments.
<i>Description</i>	Apartment Sprinkler System
<i>Lifecycle</i>	Weekly / Annual Inspection
<i>Required maintenance</i>	Weekly Check of Sprinkler Pumps and plant and annual testing and certification of plant by specialist.
<i>Year</i>	All
<i>Priority</i>	Cost for replacement equipment to be updated on completion of design matrix of equipment at detailed design stage.
<i>Selection process</i>	The Apartment sprinkler system shall be installed in accordance with European Standard BS EN 12845:2015 – Fixed firefighting systems. Automatic sprinkler systems. Design, installation, and maintenance.
<i>Reference</i>	N/A

6.2.7 Protective Services – Dry Risers (Where Applicable by Fire Cert)

<i>Location</i>	Common Area Cores of Apartments
<i>Description</i>	Dry Risers
<i>Lifecycle</i>	Weekly / Annual Inspection
<i>Required maintenance</i>	Visual Weekly Checks of Pipework and Landing Valves with Annual testing and certification by specialist.
<i>Year</i>	Annually
<i>Priority</i>	Cost for replacement equipment to be updated on completion of design matrix of equipment at detailed design stage.
<i>Selection process</i>	The system shall be installed in accordance with the Irish Standard IS 391:2020: EN – Fire Hydrant System Equipment & Effective Fire Safety in the Design, Management and Use of Buildings.
<i>Reference</i>	N/A

6.2.8 Fire Fighting Lobby Ventilation (To Fire Consultants Design and Specification)

<i>Location</i>	Common Area Lobbies
<i>Description</i>	Smoke Extract / Exhaust Systems
<i>Lifecycle</i>	<ul style="list-style-type: none"> Regular Tests of the system Annual inspection of Fans Annual inspection of automatic doors and Automatic Opening Vents (AOV) All systems to be backed up by life safety systems.
<i>Required maintenance</i>	Annual Service Inspections to be included as part of Development Planned Preventative Maintenance (PPM) Programme.
<i>Year</i>	Weekly / Annually
<i>Priority</i>	Medium
<i>Selection process</i>	All equipment to be detailed as part of the detailed design section of the development. This equipment will be selected in conjunction with the design and management team to meet and exceed the Chartered Institution of Building Services Engineers of Ireland's (CIBSE) recommended lifecycles.
<i>Reference</i>	N/A

6.2.9 Sustainable Services

<i>Location</i>	Residential / Apartments
<i>Description</i>	Heat Pumps (ASHP)
<i>Lifecycle</i>	<ul style="list-style-type: none"> Annual Maintenance of Air Source Heat Pumps (ASHP) Cost for replacement equipment to be updated on completion of design matrix of equipment at detailed design stage.
<i>Required maintenance</i>	Annual Service Inspections to be included as part of Development Planned Preventative Maintenance (PPM) Programme
<i>Year</i>	Annually
<i>Priority</i>	Medium
<i>Selection process</i>	All equipment to be detailed as part of the detailed design section of the development. This equipment will be selected in conjunction with the design and management team to meet and exceed the Chartered Institution of Building Services Engineers of Ireland's (CIBSE) recommended lifecycles.
<i>Reference</i>	N/A

<i>Location</i>	Non-Residential and Common Areas
<i>Description</i>	Heat Pumps, (ASHP).
<i>Lifecycle</i>	<ul style="list-style-type: none"> Annual Maintenance of Air Source Heat Pumps Cost for replacement equipment to be updated on completion of design matrix of equipment at detailed design stage.
<i>Required maintenance</i>	Annual Service Inspections to be included as part of Development Planned Preventative Maintenance (PPM) Programme
<i>Year</i>	Annually
<i>Priority</i>	Medium
<i>Selection process</i>	All equipment to be detailed as part of the detailed design section of the development. This equipment will be selected in conjunction with the design and management team to meet and exceed the Chartered Institution of Building Services Engineers of Ireland's (CIBSE) recommended lifecycles.
<i>Reference</i>	N/A

<i>Location</i>	Roof
<i>Description</i>	Photovoltaic (PV) Solar Panel Thermal Array on roof supporting the Part L / NZEB requirements. Full Details to be provided at detailed stage.
<i>Lifecycle</i>	<ul style="list-style-type: none"> • Quarterly Clean • Annual Inspection • Cost for replacement equipment to be updated on completion of design matrix of equipment at detailed design stage.
<i>Required maintenance</i>	Quarterly / Annual Service Inspections to be included as part of the Development Planned Preventative Maintenance (PPM) Programme
<i>Year</i>	Annually
<i>Priority</i>	Medium
<i>Selection process</i>	All equipment to be detailed as part of the detailed design section of the development. This equipment will be selected in conjunction with the design and management team to meet and exceed the Chartered Institution of Building Services Engineers of Ireland's (CIBSE) recommended lifecycles.
<i>Reference</i>	N/A

07

APPENDIX 1

7.0 APPENDIX 1 – SCHEDULE FOR COSTS EVALUATION

7.1 Schedule for Cost Evaluation

The Schedule for Costs Evaluation provides a framework to allow costs per apartment, quantified from the development, to be applied. At detailed design stage, schedule of areas and quantity of items is provided by the Architect and Quantity Surveyor to allow quantification of the lifecycle replacement costs during the lifespan of the building.

Further to this, once detailed design is confirmed, annual cost of maintenance will also be calculated to include with the schedule, to complete the overall costs evaluation.

The schedule will be modified to suit when developer's Architect and Quantity Surveyor provide requisite schedules of areas and quantity and cost of items for the development.

The sampled schedule attached lays out all Building Fabric and Building Services Elements, associated specification and locations. These are then quantified as cost per unit, alongside maintenance costs with VAT rate, and broken into Annual Costs, and many specific commentaries, for the eventual end user of the property.

SAMPLE Life Cycle Costs
Summary of Costs

Element - Building Fabric										
Specification	Location(s)	Area / Quantity	Cost Per unit	Maintenance Cost	Total Cost	Net Rate	Net Inclusive Cost	Anticipated Life Span (Yrs)	Annual Cost	Net Rate
Carpet	Staircases / Common Areas					13.5%		12	€ -	13.5%
Tile	Common Areas / Apartments					13.5%		25	€ -	13.5%
Timber	Apartment					13.5%		12	€ -	13.5%
Paint	Staircases / Common Areas					13.5%				
Paint	Common Areas / Apartments					13.5%				
Paint	Apartment					13.5%				
Flat Roof, Green Roof	Roof					13.5%		25	€ -	13.5%
TBC	Multiple Locations					13.5%		30	€ -	13.5%
TBC	Multiple Locations					13.5%		30	€ -	13.5%
TBC	Multiple Locations					13.5%		20	€ -	13.5%
TBC	Apartment					13.5%		60	€ -	13.5%
TBC	External					13.5%		60	€ -	13.5%
TBC	External					13.5%		60	€ -	13.5%
Loose Furniture	Apartment					23.0%		12	€ -	23.0%
Kitchens, Wardrobes, etc	Apartment					13.5%		12	€ -	13.5%
Kitchen Appliances	Apartment					23.0%		7	€ -	23.0%
Seals, Tables, Playground	External					13.5%		20	€ -	13.5%
Flooring, Handrails, Benches, etc	External									
Element - Building Services										
Pipework Distribution	Basement					13.5%		60	€ -	13.5%
Gas Fired CHP / ASHP	Basement							15		
Gas Fired Boilers	Basement					25				
Buffer Vessel	Basement					13.5%		15	€ -	13.5%
Electrical Main Board	Basement					13.5%		30	€ -	13.5%
Electrical Boards	Various Levels					13.5%		20	€ -	13.5%
Replacement Cold Water - Booster Pumps	Basement					13.5%		35	€ -	13.5%
Smoke Extract - Impulse Fans	Basement					13.5%		25	€ -	13.5%
Lifts	Basement					13.5%		35	€ -	13.5%
Lighting - Landlord	Basement					13.5%		30	€ -	13.5%
Standby Generators	Basement					13.5%		40	€ -	13.5%
Fire Alarm	Various					13.5%		20	€ -	13.5%
Apartment Board	Apartment					13.5%		20	€ -	13.5%
Apartment HBU	Apartment					13.5%		20	€ -	13.5%
Apartment HBU	Apartment					13.5%		20	€ -	13.5%
Site Lighting	Site									

08

CONCLUSION & CONTACT DETAILS

8.0 CONCLUSION & CONTACT DETAILS

Building materials proposed for use on elevations and in the public realm achieve a durable standard of quality that will not need regular fabric replacement or maintenance outside general day to day care. The choice of high quality and long-lasting materials, as well as both soft and hardscape in the public, semi-public and private realm, and communal open space will contribute to lower maintenance costs for future residents and occupiers.

Contact Details

Darren Davidson

Managing Director

E: Davidson-darren@aramark.ie

M: +353 83 450 8794

D: +353 1 871 5494

W: www.aramarkproperty.ie

Aramark Key Service Lines



DOCUMENT CONTROL SHEET

Client:	RUIRSIDE DEVELOPMENTS LIMITED
Project Title:	42A PARKGATE STREET, DUBLIN 8 (BLOCK A + B2 AMENDMENTS) LARGE-SCALE RESIDENTIAL DEVELOPMENT
Document Title:	BUILDING LIFECYCLE REPORT

Rev.	Status	Author	Reviewed By	Issue Date
AP 01.	DRAFT	Conor Fahey	Dean Brassington	17/02/2025
AP 02.	FINAL	Conor Fahey	Dean Brassington	20/02/2025

